


EC-PC4UD55B-BC-PVC-**XXX-ZZ**-10

NETLAN U/UTP
 4, 5 (D), 100, 2 RJ45/8P8C,
 T568B,
 - 10

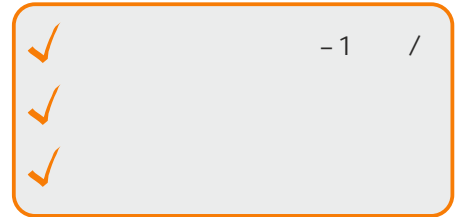


EC-PC4UD55B-BC-PVC-**XXX-ZZ**-10

5,

T568B.

RJ45/8P8C.

NETLAN

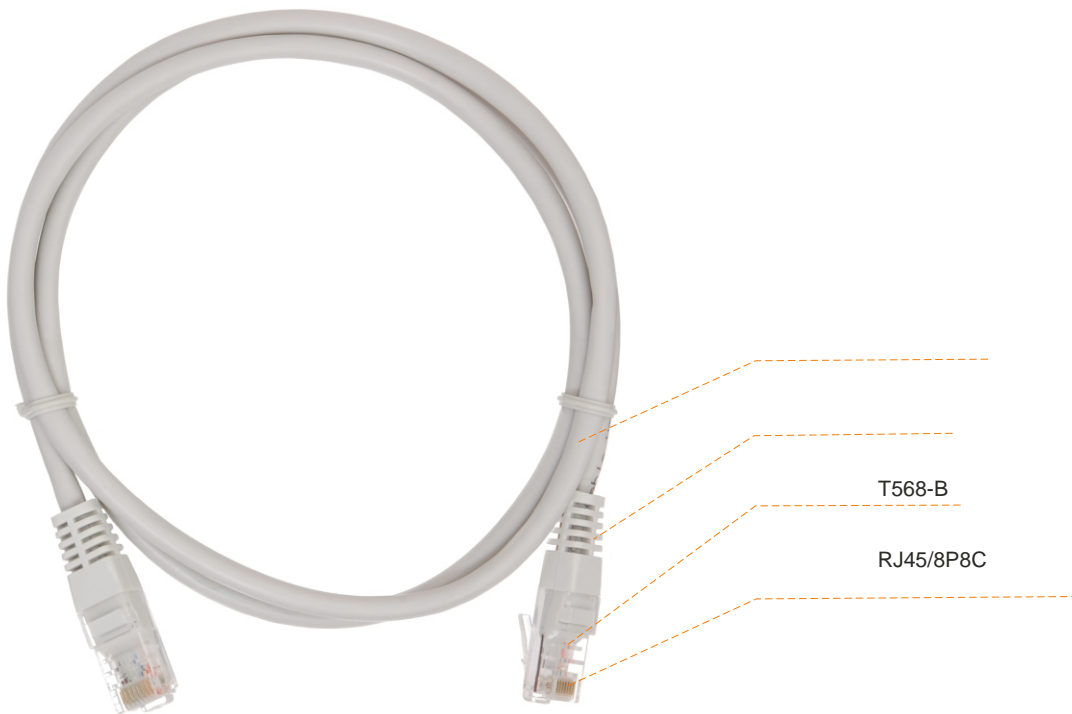

EC-PC4UD55B-BC-PVC-**XXX-ZZ**-10

XXX — (005 — 0,5, 010 — 1, ...)
ZZ — :

- GY —
- WT —
- OR —
- GN —
- BL —
- RD —
- YL —
- BK —
- PK —

	EC-PC4UD55B-BC-PVC-XXX-ZZ-10
	5e
	100
	UTP
	4
	26 AWG (7 0,160 ± 0,1)
	2xRJ45/8P8C
	3
	T568B
	(PE)
	(PVC)
	5,2 ± 0,3
	: ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	- -20 +60. - -20 +50
	1
	10

					C ₃	
EC-PC4UD55B-BC-PVC-003-zz-10	5e		0,3	10	0,0015	0,10
EC-PC4UD55B-BC-PVC-005-zz-10	5e		0,5	10	0,0018	0,13
EC-PC4UD55B-BC-PVC-010-zz-10	5e		1	10	0,0023	0,22
EC-PC4UD55B-BC-PVC-015-zz-10	5e		1,5	10	0,0025	0,30
EC-PC4UD55B-BC-PVC-020-zz-10	5e		2	10	0,0030	0,45
EC-PC4UD55B-BC-PVC-030-zz-10	5e		3	10	0,0038	0,70
EC-PC4UD55B-BC-PVC-050-zz-10	5e		5	10	0,0057	1,00
EC-PC4UD55B-BC-PVC-100-zz-5	5e		10	5	0,0090	1,98