

# EC-UU010-5-PVC-GY-3

U/UTP 10 , .5,  
PVC, , 305

✓ - 100 /c

✓

5  
100 /c.



EC-UU010-5-PVC-GY-3

10

5

(B).

305

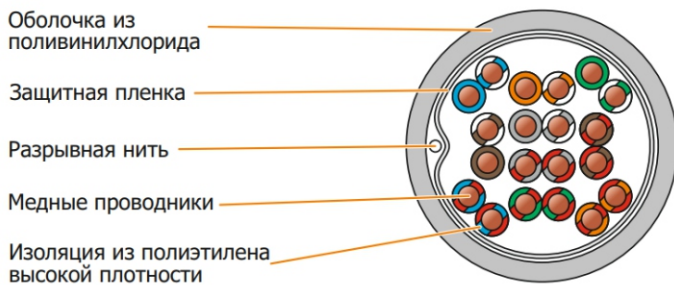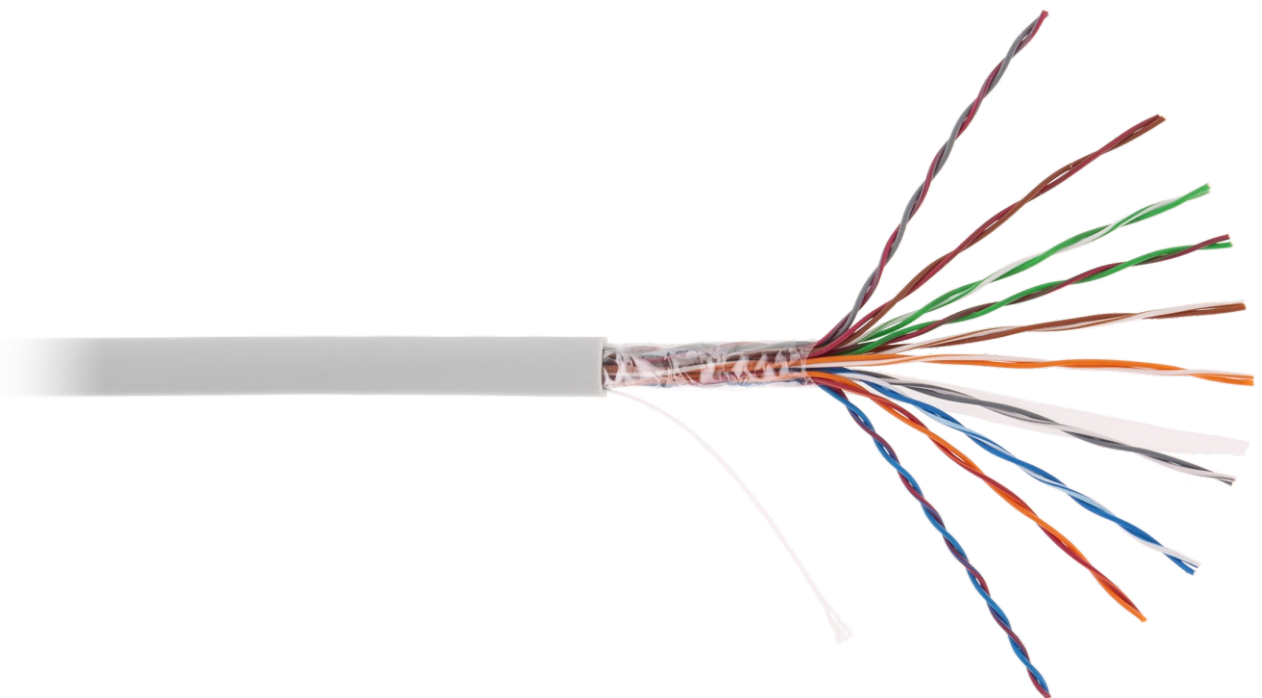

NETLAN EC-UU010-5-PVC-GY-3 UTP SOLID ETHERNET LAN CABLE 10P CATEGORY 5 PVC (Hr(B))



	EC-UU010-5-PVC-GY-3
	5
	100
	U/UTP
	0,47 ± 0,01
	(HDPE)
	0,2 ± 0,02
	0,85 ± 0,03
	(PVC)
	( )
	0,8 ± 0,01
	7,6 ± 0,2
	-
	65,8 ± 0,5
	8-
	6-
	100
	100 ± 15
	115
	305
	: ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	-20 +60 0 +50 -20 +60
	-
	1

EC-UU010-5-PVC-GY-3	5	10	U/UTP	, PVC		305	0,043200	24,000